


Separator Medium Filters

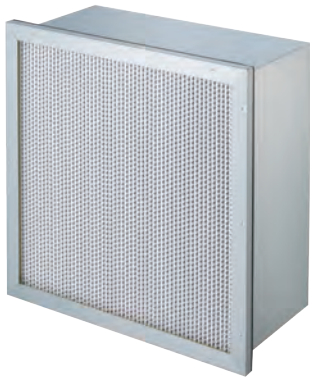

Material Overview

- ◆ Fine fibre ensures that filter maintains its efficiency throughout its life in the system
- ◆ Suitable for variable airflow
- ◆ High dust holding capacity Robust design


Application

- ◆ Built-up filter banks, rooftops, split systems, free-standing units, package systems and air handlers

Standard

ASHRAE 52.2:2017	MERV 11 - 14
EN779:2012	M6 - F8
Filter Depth (Inches)	12"
Media Type	Glass Fibre
Frame Material	Galvanized Steel, Aluminum MDF, Plywood
Separator Style	Aluminum
Header Type	Single Flange, Box Type
Rec. Final Resistance	350 Pa
Max Operating Temperature	90°C

Initial Resistance vs. Airflow (24"x24"x12")

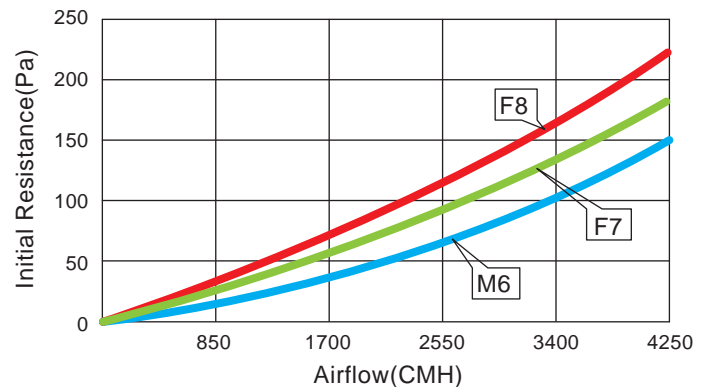

Product Details

Model	Nominal Size Inches (H x W x D)	Actual Size mm (H x W x D)	Header Type	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
M6 Classification (MERV 11)					
BA	12 x 24 x 12	289 x 593 x 292	Box	1,700	110
	24 x 24 x 12	593 x 593 x 292		3,400	
	12 x 24 x 12	289 x 593 x 292	Single	1,700	
	24 x 24 x 12	593 x 593 x 292		3,400	
F7 Classification (MERV 13)					
BA	12 x 24 x 12	289 x 593 x 292	Box	1,700	150
	24 x 24 x 12	593 x 593 x 292		3,400	
	12 x 24 x 12	289 x 593 x 292	Single	1,700	
	24 x 24 x 12	593 x 593 x 292		3,400	
F8 Classification (MERV 14)					
BA	12 x 24 x 12	289 x 593 x 292	Box	1,700	160
	24 x 24 x 12	593 x 593 x 292		3,400	
	12 x 24 x 12	289 x 593 x 292	Single	1,700	
	24 x 24 x 12	593 x 593 x 292		3,400	

* Other dimensions are available on request *

